


# GGTC02 Series

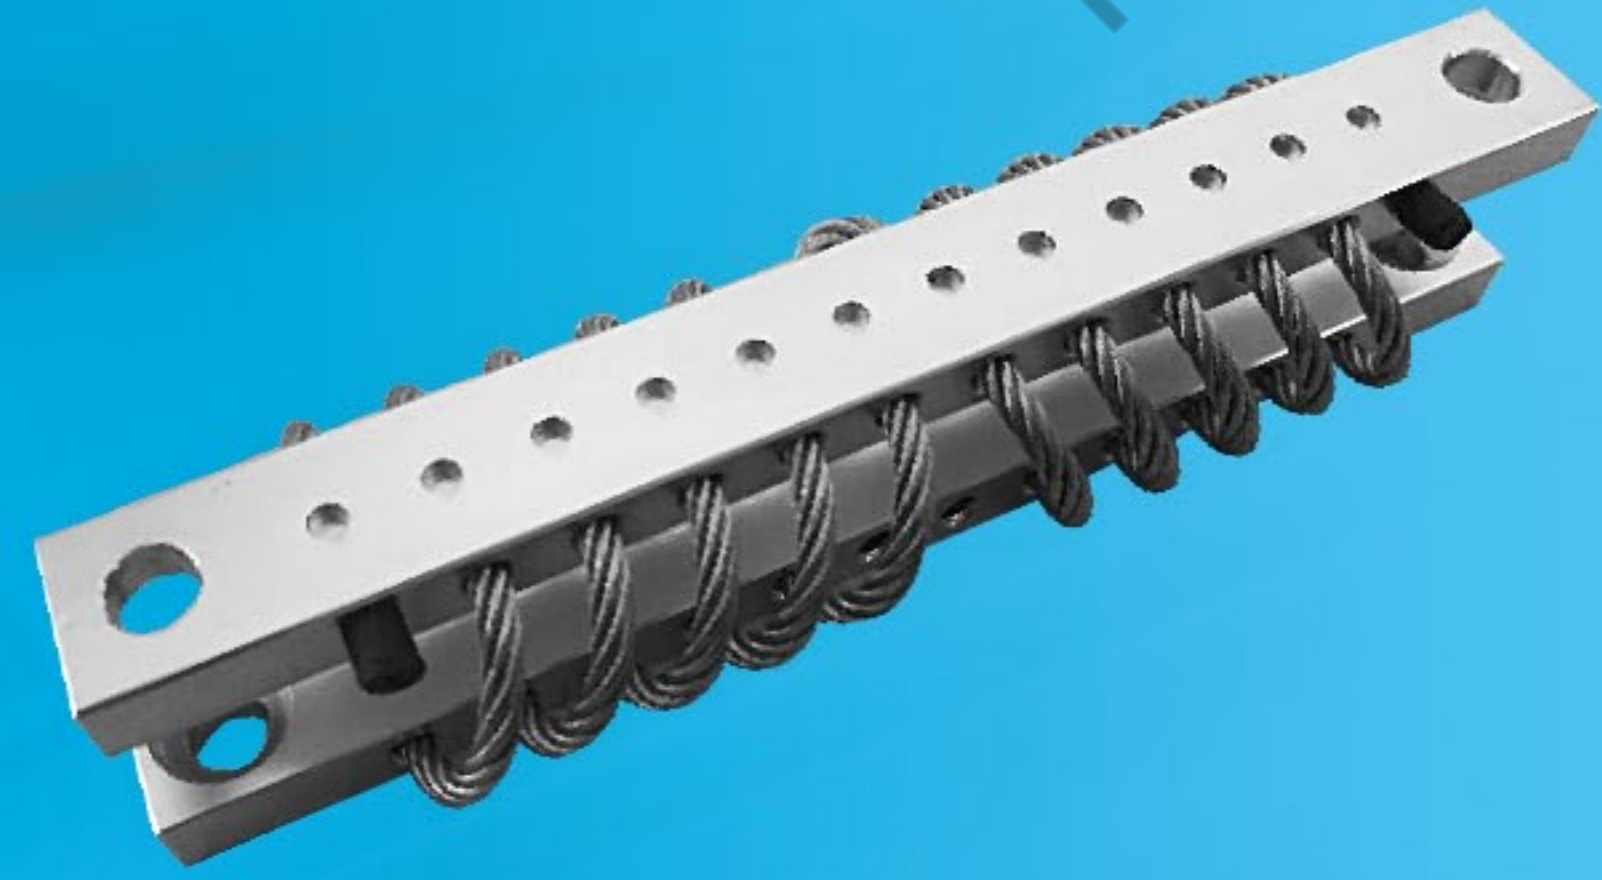


- ◆ All-metal multidirectional anti-vibration/shock mounts.
- ◆ Excellent reliability and long lifespan.
- ◆ High damping.
- ◆ Corrosion resistant.
- ◆ Wide temperature range: -180°C ~ +300°C.
- ◆ Great adaptability/versatility.
- ◆ Customized design can be done.


## Materials

Cable: Stainless steel.  
 Retainer bars: Aluminum alloy (Anodized or Alodine).  
 Other materials on request.

## Model Description

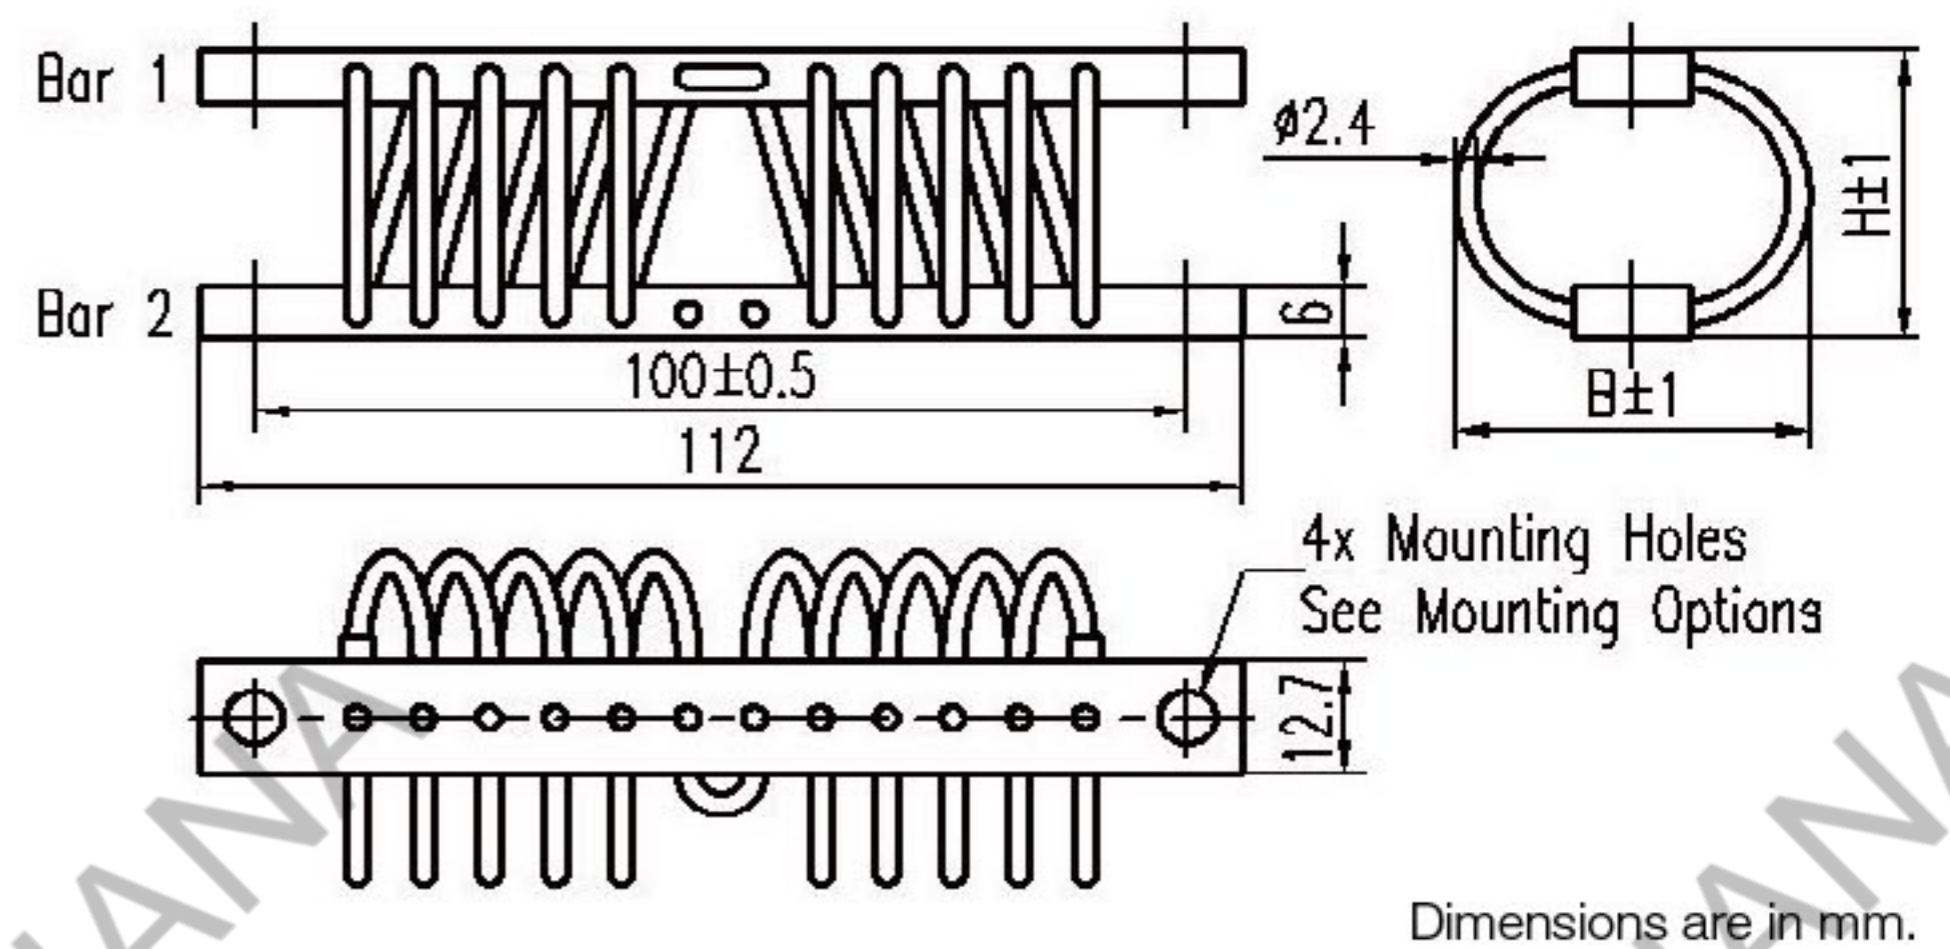

Model	Height (mm)	Width (mm)	Weight (kg)
GGTC2.4-23/28/10L	23	28	0.08
GGTC2.4-25/30/10L	25	30	0.08
GGTC2.4-28/33/10L	28	33	0.08
GGTC2.4-33/38/10L	33	38	0.09
GGTC2.4-36/41/10L	36	41	0.09
GGTC2.4-38/43/10L	38	43	0.09

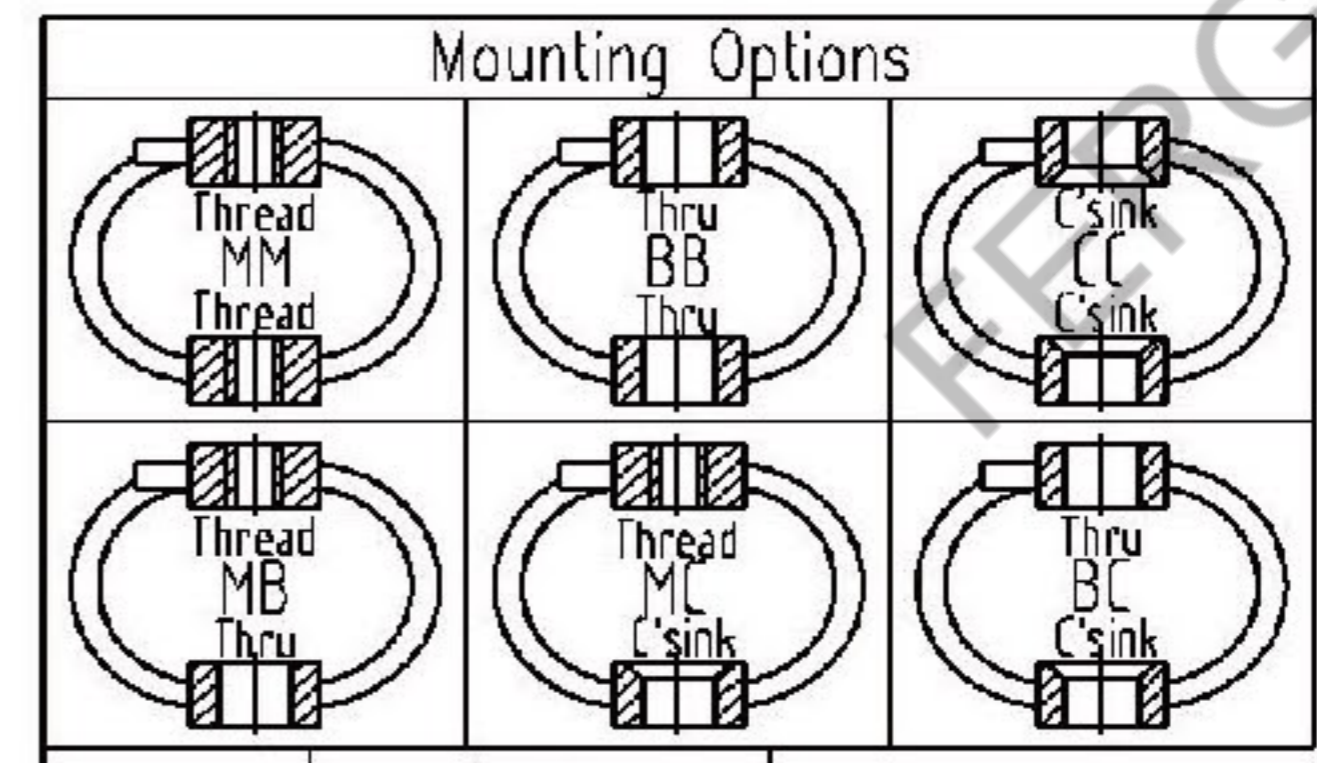


Mounting Holes	Bar 1		
	2xM5	2xφ6	2xφ6 φ9.5x90°
Bar 2	2xM5	MM	
	2xφ6	MB	BB
2xφ6 φ9.5x90°	MC	BC	CC

Note:  
Standard Mounting: MM

## Order Example

GGTC2.4 - 25 / 30 / 10 L / MB

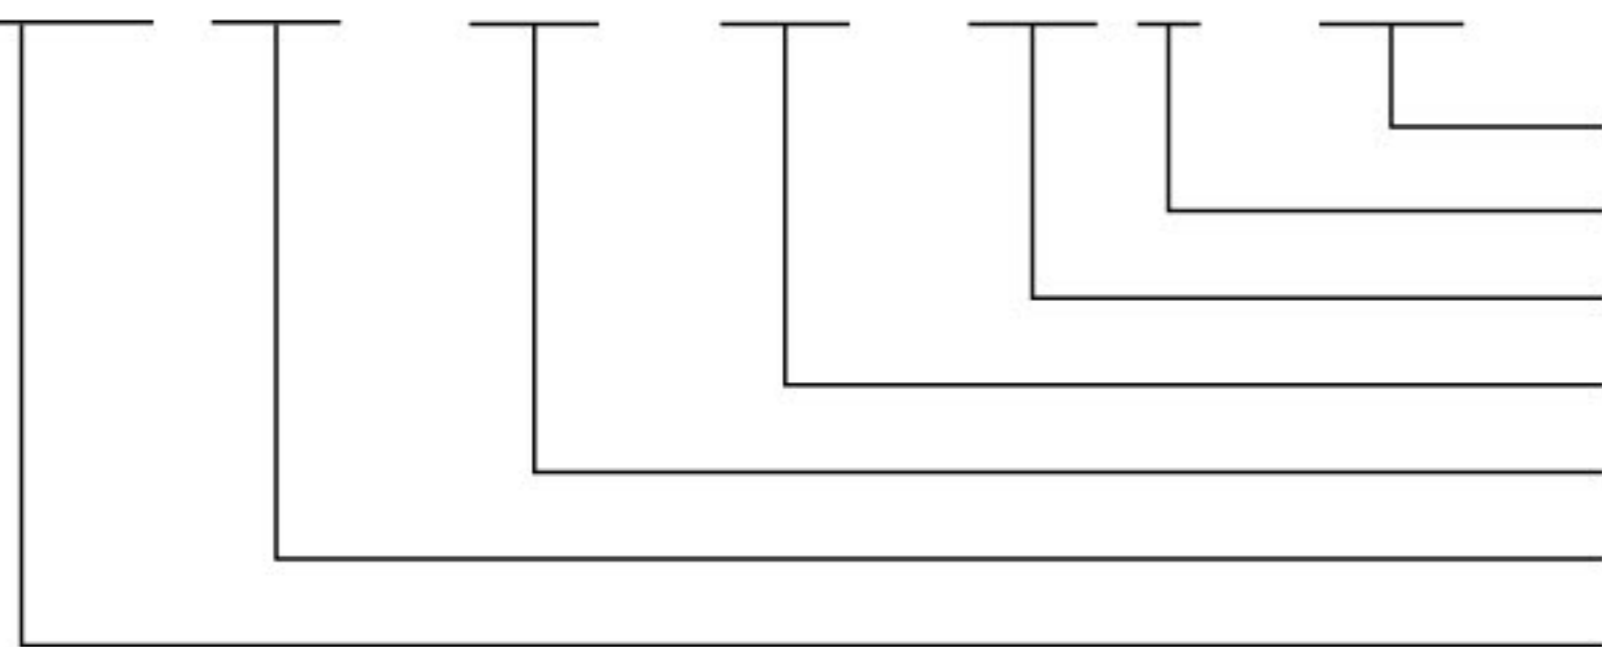

- Mounting Option: MM is default option.
- Retainer Bars Material: Aluminum Alloy (Stainless Steel is available).
- Number of Cable Loops: 10
- Width: 30mm
- Height: 25mm
- Wire Rope Diameter: 2.4mm
- Group: GGTC